



| | |
|---------------------|--------------|
| Project: | Type: |
| Prepared By: | Date: |

| Driver Info | | LED Info | |
|-------------|------------------|----------------|-------------------------------|
| Type | Constant Current | Watts | 20W |
| 120V | 0.19A | Color Temp | 2700K/3000K/3500K/4000K/5000K |
| 208V | N/A | Color Accuracy | 90 CRI |
| 240V | N/A | L70 Lifespan | 50,000 Hours |
| 277V | N/A | Lumens | 1,500 |
| Input Watts | 20W | Efficacy | 75 |

Technical Specifications

Performance

Description:

5CCT selectable, low maintenance, standard back-lit LED retrofit fixture installs on standard junction boxes.

Product Type:

Surface & Flush Mounts

Input Wattage:

20W

Lumens (Nominal):

1500lm

Efficacy:

75 lm/W

L70 Lifespan:

50,000-Hour LED lifespan based on IES LM-70 results

R9 Value:

High color performance with R9 greater than or equal to 50

Compliance

UL Listed:

Suitable for wet locations

ENERGY STAR V2.2:

This product is ENERGY STAR® Version 2.2 Certified.

Energy Star ID:

2389555

Electrical

Dimming Driver:

TRIAC compatible dimmer with dimming as low as 10%.

THD:

≤20%

Power Factor:

≥0.9

Flicker:

≤30%

Technical Specifications (continued)

Electrical

Input Voltage:

120V

Operating Frequency:

60Hz

Construction

Material:

Plastic

Trim Style:

Smooth Trim

Shape:

Round

Mounting:

Surface mount

Operating Temperature:

-20°C (-4°F) to 40°C (104°F)

Size:

14"

Optical

Beam Angle:

120°

Other

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.


Trade Agreements Act Compliant:

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

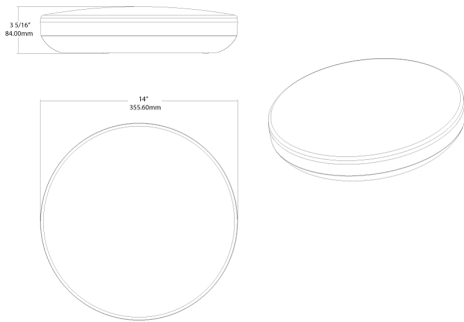

Features

- Surface Mount to ceiling or wall
- Field adjustable "set and forget" color temperature
- Diffused lens provides soft, smooth light
- Ideal for hospitality and multi-family residential applications
- Triac and 0-10V dimming options
- Suitable for wet and damp locations
- 50,000-Hour lifespan

Ordering Matrix

| Family | Type | Size | Shape | Wattage | CRI/Color Temp | Voltage | Dimming | Finish | Sensor | Options |
|--------|------------------------------|--|-----------|----------------------------------|-------------------------------|------------------------------|--|----------------------------------|--|---|
| CRVFA | S | 14 | R | 20 | 9CCT | 120 | | W | | |
| | S = Smooth D = Decorative | 11 = 11" 12 = 12" 14 = 14" 18 = 18" 19 = 19" | R = Round | 16 = 16W 20 = 20W 32 = 32W | 9CCT = 90 CRI, CCT Selectable | 120 = 120V UNV = 120-277V | Blank = 0-10V Dimming T = Triac Dimming | W = White BN = Brushed Nickel | Blank = No Sensor /MVS = Microwave Occupancy Sensor | Blank = No Option /EM = Battery Backup /EMBB = Battery Backup |