




Morris CAT#: 22550-22555

Nylon Cable Glands - NPT Thread

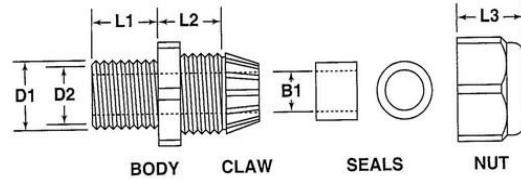

Features:

- Seal & Clamp System allows cord connector to tighten in a Circular Sequence on the sealing ring to give Superior Strain Relief without twisting or damaging the cable
- Simply push the cable through the liquid-tight nylon strain relief & tighten nut for quick installation
- Threads into your panel for clearance, locknut included
- Internal Ratchet with Self-Locking Feature protects against vibration
- 'Collet' Design Accommodates Various Size Cords, Cables, Tubing, etc.
- Nylon Body Material is resistant to most common chemicals & solvents
- For Best Results, Use the Minimum Size that accommodates your cable
- No Disassembly Required
- Made of UL approved NYLON 66, 94V-2 (Black)
- IP68 Rated Submersible & Dustproof
- UL Recognized
- 94V-2 Flame Rating, -22°F to 140°F Temp Rating
- Locknut Not Included (Sold Separately)

DIMENSIONS = INCHES

CAT. NO.	NPT THREAD	CABLE RANGE	D1	D2	B1	L1	L2	L3	BAG QTY	MASTER BAG QTY
22550	1/4-18	.118" - .256"	.520"	.327"	.236"	.299"	.500"	.520"	10	100
22551	3/8-18	.197" - .394"	.646"	.421"	.354"	.575"	.539"	.661"	10	100
22552	1/2-14	.394" - .551"	.815"	.587"	.500"	.492"	.740"	.724"	10	100
22553	3/4-14	.512" - .709"	1.008"	.728"	.650"	.575"	.701"	.878"	10	100
22554	1-11.5	.709" - .984"	1.299"	1.024"	.933"	.579"	.811"	1.071"	10	100
22555	1-1/4-11.5"	.866" - 1.260"	1.642"	1.260"	1.142"	.705"	.882"	1.236"	10	100