



# POWER CONNECTORS

## Long Barrel Aluminum Compression Splices

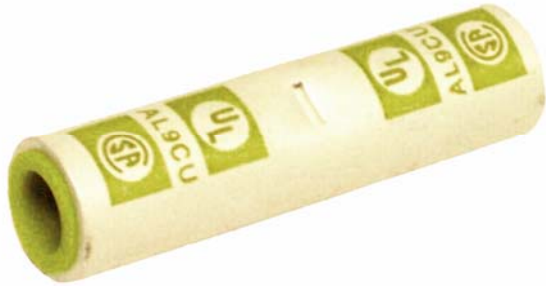

- Lugs accept both aluminum and copper conductors
- Connector bores are coated with oxide inhibitor & capped
- Center stop assures proper cable installation
- Made of high-conductivity seamless aluminum
- Uniform bright electro-tin plating resists corrosion, reduces contact resistance and gives you maximum conductivity
- Color Coded for easy identification
- Marked with die index
- Crimp marks indicate proper crimp locations
- UL486B Listed AL9CU
- Listed for 35 KV when properly installed



Dimension Measurements = Inches & (Millimeters)

Cat No.	Wire Range	Color Code	Box Qty	Inside Diameter	Outside Diameter	Length	Each
93208	8 Str.	Blue	50	.18(4.5)	.31(7.3)	1.50(38.1)	
93210	6 Str.	Gray	50	.20(5.0)	.34(8.6)	1.63(41.4)	
93212	4 Str.	Green	30	.25(6.3)	.44(11.1)	2.00(50.8)	
93214	2 Str.	Pink	30	.31(7.8)	.53(13.4)	2.38(60.4)	
93216	1 Str.	Gold	15	.35(8.8)	.53(13.4)	2.38(60.4)	
93218	1/0 Str.	Tan	20	.39(9.9)	.63(16.0)	2.50(63.5)	
93220	2/0 Str.	Olive	20	.44(11.1)	.69(17.5)	2.63(66.8)	
93222	3/0 Str.	Ruby	15	.48(12.2)	.76(19.3)	2.88(73.1)	
93224	4/0 Str.	White	10	.55(13.9)	.84(21.3)	3.13(79.5)	
93226	250 MCM	Red	9	.59(14.9)	.92(23.3)	3.25(82.5)	
93228	300 MCM	Blue	9	.65(16.5)	1.01(25.6)	3.25(82.5)	
93230	350 MCM	Brown	6	.72(18.2)	1.12(28.4)	3.88(98.5)	
93232	400 MCM	Green	6	.76(19.3)	1.19(30.2)	4.88(123.9)	
93234	500 MCM	Pink	6	.84(21.3)	1.32(33.5)	5.00(127.0)	
93236	600 MCM	Black	4	.92(23.3)	1.44(36.5)	5.13(130.3)	
93238	750 MCM	Yellow	4	1.03(26.1)	1.60(40.6)	5.38(136.6)	