



U4490-XL

6 Terminal Ringless Small Closing Plate Lever Bypass

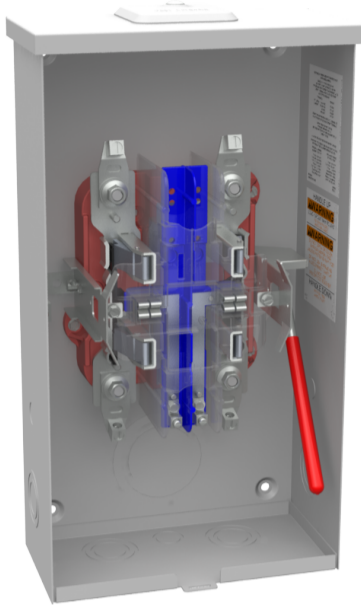

Appears In:

[Indiana](#)

[Ohio](#)

SPECIFICATIONS

| | |
|---------------------------|--|
| Brand Name | Milbank |
| Type | Ringless Meter Socket |
| Application | Meter Socket |
| Standard | UL Listed;Type 3R |
| Voltage Rating | 600 Volts Alternating Current |
| Amperage Rating | 80 Continuous Ampere |
| Phase | 1 Phase |
| Frequency Rating | 60 Hertz |
| Size | 4.844L x 10W x 18.5H |
| Number of Main Breakers | 0 |
| Main Breaker Size | No Main Breaker |
| Cable Entry | Overhead or Underground |
| Terminal | Single Mechanical |
| Insulation | Glass Polyester |
| Mounting | Surface Mount |
| Material | G90 Galvanized Steel with Powder Coat Finish |
| Number of Jaws | 6 Terminal |
| Bypass Provision | Lever Bypass |
| Number of Meter Positions | 1 Position |
| Equipment Ground | Ground Lug |
| Hub/Closing Plate | Small Closing Plate |
| Line Side Wire Range | 14 - 2 AWG |
| Load Side Wire Range | 14 - 2 AWG |
| Number Of Receptacles | 0 |
| Height | 18.5 IN |
| Length | 4.844 IN |
| Width | 10 IN |

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply

with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.