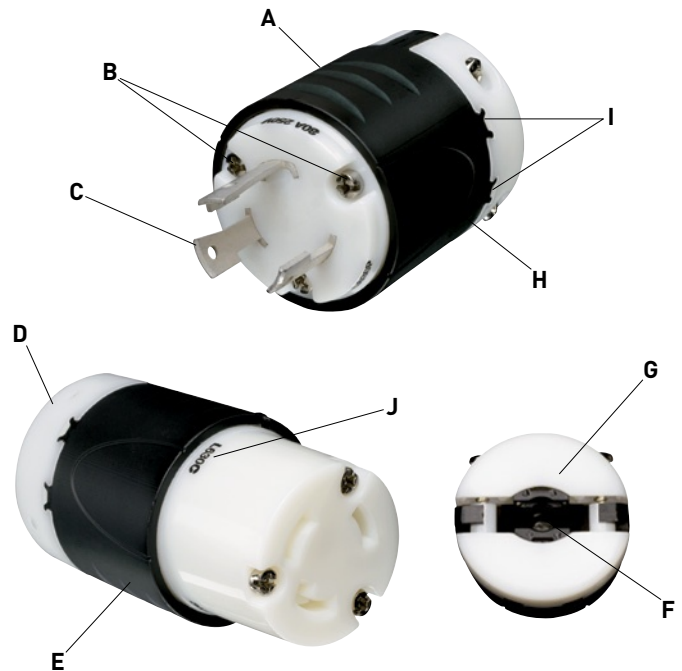



## TURNLOK® LOCKING DEVICES

**L630C & L630P**  
Connector & Plug

- A. Raised ribs** provide non-slip gripping profile for turning to lock and unlock.
- B. Quick-thread assembly screws** and cord-grip screws come backed-out, ready-to-wire.
- C. Industrial-strength, brass alloy plug blades**, and connector contacts resist heat rise, provide excellent conductivity.
- D. Rounded back contour** reduces snags and hang-ups on the job site.
- E. Impact- and corrosion-resistant** heavy-duty nylon shell material resistant to impacts and abuse.
- F. Integral flexible rubber cord grommet** conforms to and seals around SO cord to provide protection from oils, water, or chips entering wiring chamber.
- G. New-design external cord grips** provide visible assurance of safe and proper cord retention and a wide range of OD acceptance.
- H. Scallop shell design** provides non-slip gripping surface for insertion and withdrawal.
- I. Double dovetail design** provides superior protection against cord pull-out forces.
- J. Visible stamped NEMA configuration and device rating.**

**L630R**  
Receptacles

- A. Compact, impact-resistant nylon face and body** are ultrasonically welded together for unrivaled strength.
- B. Clearly marked NEMA configuration, rating, and third party listing** on each unit's face.
- C. One-piece, high-grade brass contacts** offer excellent conductivity and heat-rise resistance.
- D. Single-piece, solid brass mounting strap** is free of easily loosened rivets found on other brands.
- E. Side and external screw-pressure-plate back wire capability.** Accepts #14 - #10 AWG.

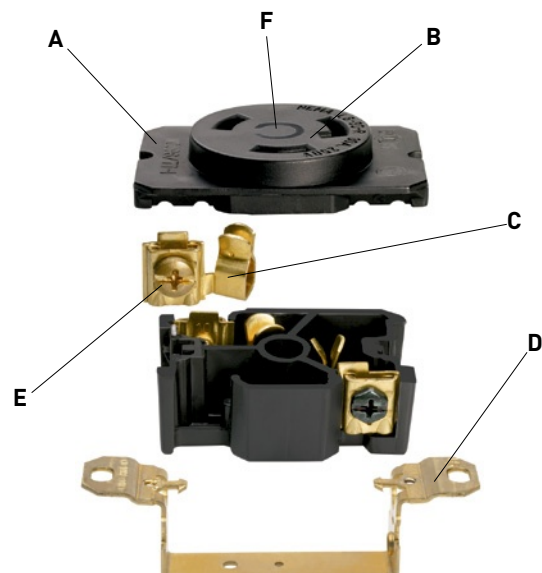


- F. P&S Turnlok Receptacles.** Voltage color coding on the outside. Proven designs and quality materials on the inside. Any way you look at them, they're the standard of the industry.




# TURNLOK® LOCKING DEVICES

## 30 Amp NEMA L1030, L1130, L1230 & L1330


3 Pole, 3 Wire Non-Grounding 30A, 125/250V; 3ø, 250, 480 & 600V




30A Receptacle




30A Connector







30A Plug



30A Flanged Inlet & Outlet




CATALOG NUMBER	RATING		DESCRIPTION/COLOR	CORD DIAMETER	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE		
	A.	V.				UL498	FSUL WC596	CSA
<b>RECEPTACLES</b>								
L1030R	30	125/250	Single Receptacle, Black		L10-30R	•	•	
L1130R	30	3ø, 250	Single Receptacle, Black		L11-30R	•	•	
L1230R	30	3ø, 480	Single Receptacle, Black		L12-30R	•	•	
L1330R	30	3ø, 600	Single Receptacle, Black		L13-30R	•	•	
<b>CONNECTORS IP20 SUITABILITY</b>								
L1030C	30	125/250	Black Back, White Front Body	.225"-1.150"	L10-30R	•	•	
L1130C	30	3ø, 250	Black Back, White Front Body	.225"-1.150"	L11-30R	•	•	•
L1230C	30	3ø, 480	Black Back, White Front Body	.225"-1.150"	L12-30R	•	•	•
L1330C	30	3ø, 600	Black Back, White Front Body	.225"-1.150"	L13-30R	•	•	•
<b>PLUGS IP20 SUITABILITY</b>								
L1030P	30	125/250	Black Back, White Front Body	.225"-1.150"	L10-30P	•	•	
L1130P	30	3ø, 250	Black Back, White Front Body	.225"-1.150"	L11-30P	•	•	•
L1230P	30	3ø, 480	Black Back, White Front Body	.225"-1.150"	L12-30P	•	•	•
L1330P	30	3ø, 600	Black Back, White Front Body	.225"-1.150"	L13-30P	•	•	•
<b>FLANGED INLETS &amp; OUTLETS</b>								
L1030FI	30	125/250	Gray Inlet		L10-30P	•		
L1030FO	30	125/250	Gray Outlet		L10-30R	•		•
L1130FI	30	3ø, 250	Gray Inlet		L11-30P	•		
L1130FO	30	3ø, 250	Gray Outlet		L11-30R	•		•
L1230FI	30	3ø, 480	Gray Inlet		L12-30P	•		
L1230FO	30	3ø, 480	Gray Outlet		L12-30R	•		•
L1330FI	30	3ø, 600	Gray Inlet		L13-30P	•		
L1330FO	30	3ø, 600	Gray Outlet		L13-30R	•		•



Reference Pages D-50 and D-51 for Accessories.

CATALOG NUMBER	DESCRIPTION	COLOR
<b>WEATHERPROOF COVER</b>		
WPG2	Cover for 20 and 30A Turnlok Flanged Inlets and Outlets	Gray
<b>STAINLESS STEEL WALL PLATE</b>		
SS720	Wall Plate for Locking Receptacles	302/304 S/S



WPG2

All devices listed on this page conform to NEMA WD-1 and WD-6.