



TURNLOK® LOCKING DEVICES

California Standard & Corrosion-Resistant


4 Wire Grounding 50A, 125/250V; 3Ø, 250 & 480V; 250VDC, 600VAC




Corrosion-Resistant Receptacle



Corrosion-Resistant Connector




Corrosion-Resistant Plug



Corrosion-Resistant Flanged Inlet

CATALOG NUMBER	RATING		DESCRIPTION/COLOR	CORD DIAMETER	3rd PARTY COMPLIANCE		
	A.	V.			UL498	FSUL WC596	CSA
RECEPTACLES							
CR6369	50	125/250	Corrosion-Resistant		•		•
CS6369	50	125/250	California Standard		•		•
CS8369	50	3Ø, 250	California Standard		•		•
CS8169	50	3Ø, 480	California Standard		•		•
3769	50	250VDC, 600VAC	Corrosion-Resistant		•		•
7379*	50	250VDC, 600VAC	Corrosion-Resistant		•		•
CONNECTORS							
CR6364	50	125/250	Corrosion-Resistant	.680"-1.125"	•		•
CS6364	50	125/250	California Standard	.680"-1.125"	•		•
CS8364	50	3Ø, 250	California Standard	.680"-1.125"	•		•
CS8164	50	3Ø, 480	California Standard	.680"-1.125"	•		•
3764	50	250VDC, 600VAC	Corrosion-Resistant	.680"-1.125"	•		•
7764*	50	250VDC, 600VAC	Corrosion-Resistant	.680"-1.125"	•		•
PLUGS							
CR6365	50	125/250	Corrosion-Resistant	.680"-1.125"	•		•
CS6365	50	125/250	California Standard	.680"-1.125"	•		•
CS8365	50	3Ø, 250	California Standard	.680"-1.125"	•		•
CS8165	50	3Ø, 480	California Standard	.680"-1.125"	•		•
3765	50	250VDC, 600VAC	Corrosion-Resistant	.680"-1.125"	•		•
7765*	50	250VDC, 600VAC	Corrosion-Resistant	.680"-1.125"	•		•
FLANGED INLETS							
CR6375	50	125/250	Corrosion-Resistant		•		•
CS6375	50	125/250	California Standard		•		•
CS8375	50	3Ø, 250	California Standard		•		•
CS8175	50	3Ø, 480	California Standard		•		•
CS8177	50	3Ø, 480	California Standard with Fliplid		•		•
3775	50	250VDC, 600VAC	Corrosion-Resistant		•		•
7958P*	50	250VDC, 600VAC	Corrosion-Resistant		•		•

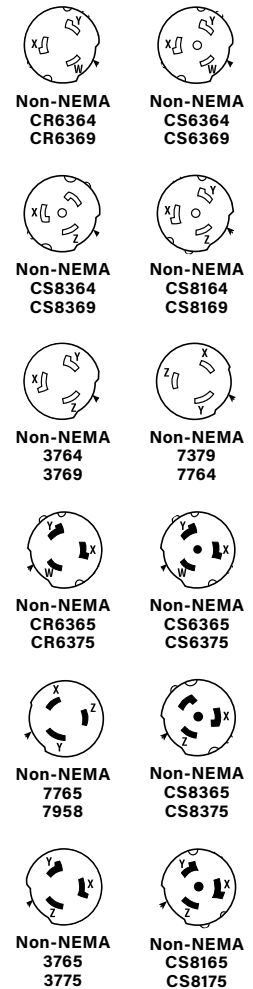

*Devices for replacement use only in existing installations. Reference pages 252 and 253 for Accessories.

CATALOG NUMBER	DESCRIPTION
ACCESSORIES	
7770	Weatherproof Cover for 50A Locking Receptacles, Thermoplastic
7770GRY	Gray Weatherproof Cover for 50A Locking Receptacles, Thermoplastic
CR7716N	Weatherproof Boot, 50A Locking Connector
CR7717N	Weatherproof Boot, 50A Locking Plug

Note: 7770 covers not to be used with flanged devices.

All devices listed on this page conform to NEMA WD-1 and WD-6.