



NEW!
more on
reverse

White Button™ Non-Metallic Cable Connectors

Easy, Push-in Installation from Inside or Outside the Box



**NM94X...Easy, push-in installation
from *OUTSIDE* a new work box...
or from the *INSIDE* of an existing box**

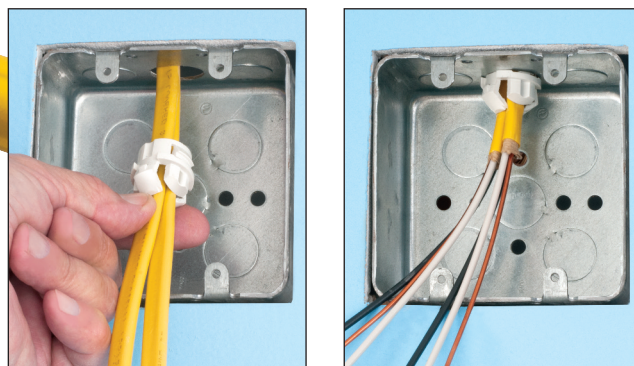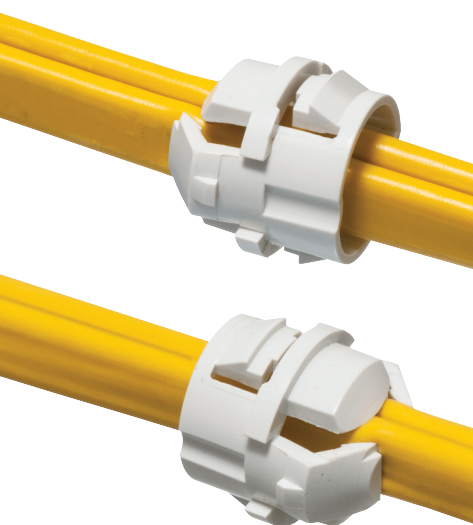

Save money with Arlington's non-metallic NM cable connectors. They're the *lowest* cost NM cable connectors on the market, and the fastest to install! Simply push the connector into the knockout, and you're done.

Listed for single or multiple cables, Arlington's new White Button™ **NM94X** connector offers smooth, easy cable insertion of one or two cables into a single opening *from the INSIDE or OUTSIDE* of the box.

NM94X is better than our very successful NM94 – and costs the same!

- 1/2" trade size NM94X holds:
 - One 14/2 to 6/2
 - One 14/2/2
 - One 12/4
 - One 12/2/2
 - One 14/3 to 10/3
 - Two 14/2 to 10/2
 - Two 14/3
 - Two 12/3
 - One 14/2 and One 12/2
 - One 14/2 and One 10/2
 - One 12/2 and One 10/2
- Easy removal with pliers or screwdriver
- UL Listed – exceeds UL and CSA pullout requirements

NEW!

NM94X
1/2"



Arlington

1 Stauffer Industrial Park
Scranton, PA 18517

800/233.4717

Fax 570/562.0646

www.aifittings.com

CATALOG NUMBER	UPC/DCI/NAED MFG #01 8997	DESCRIPTION/SIZE NM Cable Connector with SINGLE opening	COLOR/ KO SIZE	UNIT PKG	STD PKG
NM94X	05489	3/8" Trade Size	White 1/2"	200	1000

Made in USA

Black Button™ NM Cable Connectors


Made in USA 

Lowest Cost NM Cable Connector • Easy, Push-in Installation

- Listed for one or two cables
- Easy installation
- Smooth, easy cable insertion
- Secure hold on cable – exceeds UL pullout tests

CATALOG NUMBER	UPC/DCI/NAED MFG #01 8997	DESCRIPTION/SIZE NM Cable Connectors with TWO individual openings	COLOR/ KO SIZE	CABLE RANGES	UNIT PKG	STD PKG
NM942	04281	3/8" Trade Size	Black 1/2"	One or Two 14/2 One or Two 12/2 One 14/2 and One 12/2 One or Two 10/2	250	1000

In a connector with TWO SEPARATE openings: NM942

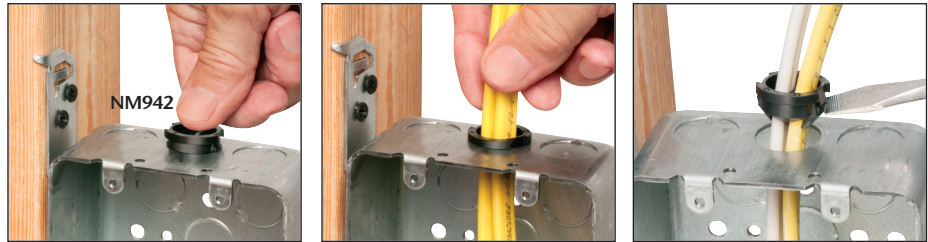

1 from OUTSIDE new work box
Push NM942 into KO with light finger pressure.

2 Insert one or two cables into individual openings.

3 To remove from KO. Slip screwdriver under connector and twist.

In a connector with a SINGLE opening
insert TWO cables together or individually into NM94, NM95 or NM96. Add a second cable without removing the first.


CATALOG NUMBER	UPC/DCI/NAED MFG #01 8997	DESCRIPTION/SIZE NM Cable Connector with SINGLE opening	KO SIZE	CABLE RANGES	UNIT PKG	STD PKG
NM94	05488	3/8" Trade Size	1/2"	One 14/2 to 6/2	250	1000
NM940	72156	3/8" Trade Size	1/2"	One 14/2/2 One 12/4 One 14/3 to 10/3 Two 14/2 to 10/2 Two 14/3 Two 12/3 One 14/2 and One 12/2 One 14/2 and One 10/2 One 12/2 and One 10/2 One 14/3 and One 12/3	100	1000
NM95	10956	3/4" Trade Size	3/4"	One 14/2 to 6/2 One 14/3 to 6/3 One 14/2/2 Two 14/2 to Two 10/2 Two 14/3 to Two 10/3 One 14/2 and One 12/2 One 14/2 and One 10/2 One 12/2 and One 10/2 One 14/3 and One 12/3	50	500
NM96	72158	1" Trade Size	1"	One 4/3 to 8/3 One 6/2 to 4/2	25	250



1 from OUTSIDE box
push the NM cable connector into KO with light finger pressure.



2 Insert one or two cables in a single opening, fast! Push the NM cable(s) into the connector to the desired length.



Arlington

1 Stauffer Industrial Park
Scranton, PA 18517

800/233.4717

Fax 570/562.0646

www.aifittings.com

Distributed by

Patented

NM94X ETC 0318/25M