

Project: \_\_\_\_\_ Type: \_\_\_\_\_ Prepared By: \_\_\_\_\_ Date: \_\_\_\_\_



### Features and Benefits

- Direct Replacement for Fluorescent Lamps: F32T8/32W, F32T8/30W, F32T8/28W, F32T8/25W
- Easy to install plug and play that requires no rewiring, no tools, no instructions
- 50,000 hour Lifespan
- Rated for use in enclosed and open fixtures in dry or damp locations
- Diffused frosted lens will maintain the same light quality over time
- Compatible with most instant start electronic T8 ballasts, see Ballast Compatibility List
- Approximately 40% more efficient than fluorescent T8 lamps
- Instant on full brightness
- Environmentally friendly, no mercury used
- NSF Listed: NSF/ANSI Standard 2 - Food Equipment - Splash Zone (Not for Direct Food Zone without additional fixture considerations)
- Dimmable, see Dimmer Compatibility List

### Technical Specifications

Performance	Construction	LED Characteristics
<b>Product Type:</b> Linear	<b>Material:</b> Glass	<b>Color Temperature:</b> 4000K Cool White
<b>Input Wattage:</b> 10.5W	<b>Bulb Shape:</b> T8	<b>Electrical</b>
<b>Lumens (Nominal):</b> 1800lm	<b>Nominal Length:</b> 4FT	<b>THD:</b> <25%
<b>Efficacy:</b> 171 lm/W	<b>Finish:</b> Frosted	<b>Power Factor:</b> Ballast Dependent
<b>Color Accuracy (CRI):</b> 80 CRI	<b>Base Type:</b> G13	<b>Operating Temperature:</b> -25°C - 45°C (-13&deg;F - 113°F)
<b>L70 Lifespan:</b> 50,000 Hours	<b>For Use Outdoors in Open Fixtures:</b> No	<b>Dimming:</b> Yes with 0-10V dimmer &plus; ballast. See Dimmer Compatibility List.

## Technical Specifications (continued)

### Electrical

**Input Voltage:**

Ballast Dependent

**Operating Frequency:**

Ballast Dependent

**Input Current @ 120V:**

Ballast Dependent

**Input Current @ 277V:**

Ballast Dependent

**Flicker:**

Ballast Dependent

### Other

**Warranty:**

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

**Equivalency:**

32W Fluorescent

### Installation

**Installation Type:**

Type A, Plug and Play

### Compliance

**UL Listed:**

Yes

**NSF Listed:**

Meets NSF/ANSI standards for use in Food Zone (non-contact), Splash, and Non-Food Zones. Tube guard required in open fixtures.

**DLC Model Number:**

T10002

**CEC Status:**

Lawful for sale in California

**Application:**

Suitable for damp locations and totally enclosed fixtures.

**DLC Listed:**

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.

DLC Product Code: PLTMMCSMZZ9Y

### Optical

**Beam Angle:**

180°


### Ballast Performance

	0.78BF	0.88BF	1.88BF
Lumens	1600	1800	2200
System Power (W)	11	13	17


### Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	25	50.8	6.3	7.4
PALLET	900	44.8	39.6	52.4

### Wiring Diagram

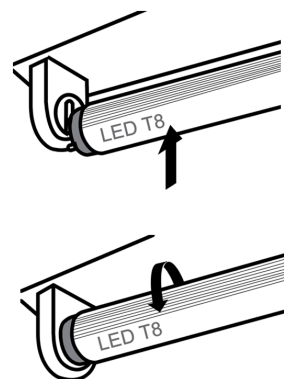

**Dimension**

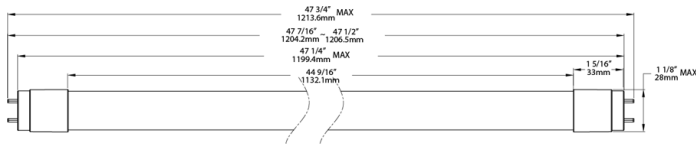

**Light Distribution**

